



STRATOS A-2

Electro-Hydraulic Surgical Operating Table



The **STRATOS A-2** operating table utilises advanced microcomputer control and electro-hydraulic transmission technology, replacing traditional electric push rod systems. This ensures more precise positioning, a uniform running speed, and enhanced stability.

Equipped with a high-pressure hydraulic system, the table offers an impressive **load-bearing capacity of up to 350 kg**, providing superior performance and durability. The head and leg plates are pneumatically adjusted for convenient and precise positioning.


For patient comfort, the table features an **70mm double-layer memory foam mattress** that evenly distributes body weight, reducing the risk of bedsores during prolonged surgeries. The seamless, antibacterial surface enhances hygiene and simplifies cleaning.

The tabletop frame, the base and lifting column cover are made of 304 stainless steel, ensuring durability, impact resistance, and ease of disinfection. The T-shaped base design provides ample foot space for medical staff, improving comfort during procedures.

A base brake system, operable via a foot pedal, ensures secure fixation of the table. An optional electric brake system is available for enhanced convenience.

Advantages:

- 304 stainless steel table frame
- 304 stainless steel base and column covers
- "T" shaped base more stable, convenient for doctor
- Mattress material : memory foam 70mm thickness, X-ray translucent -
- C-arm & X-ray compatible

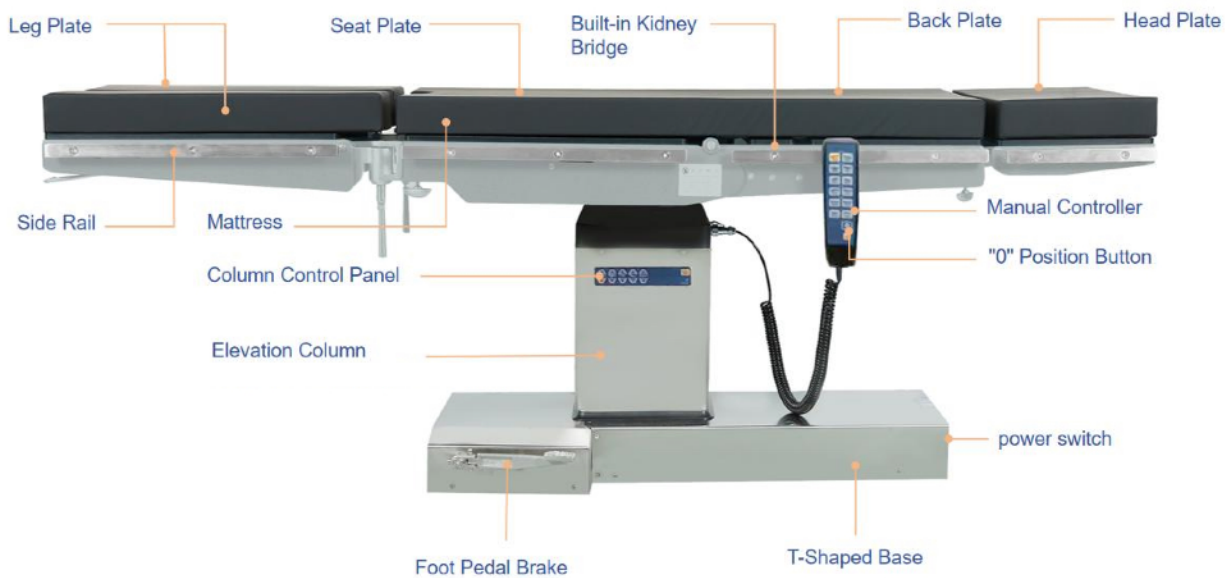

STRATOS A-2	Parameter	Remarks
Height (mm)	700-1000	Without mattress
Tabletop length (mm)	2000	/
Tabletop width (mm)	520	including side rail 580
Longitudinal slide (mm)	300	electro-hydraulic
buit-in kideny bridge (mm)	0-120	manual
Trendelenburg & Reverse Trendelenburg (°)	30/30	electro-hydraulic
Left / Right Tilt (°)	20/20	electro-hydraulic
Back Plate / back rest (Up / Down) (°)	≥75 / ≥40	electro-hydraulic
Leg Plate adjustment (Up / Down) (°)	46 / ≥90	pneumatic, detachable
Leg Plate outreach adjustment) (°)	≥90	pneumatic, detachable
Head Plate adjustment (Up / Down) (°)	50 / 90	pneumatic, detachable
Load capacity	350 kg	

Standard accessories

Mattress	1set
Hand controller	1 piece
Waist support	2 pieces
shoulder support	2 pieces
Arm plate	2 pieces
Goepel leg support	2 pieces
Anesthesia screen frame	1 piece
Radial Clamp	2 pieces
Side rail clamp	3 pieces



FABRYKA APARATURY ELEKTROMEDYCZNEJ
FAMED Łódź S.A.
 ul. Dostawcza 3D
 93-231 Łódź, POLAND

 www.famed.pl

info@famed.pl



Jarosław **Majchrzak**
+48 784 012 501
j.majchrzak@famed.pl

Manar **Saif**
+48 791 642 063
m.saif@famed.pl

Emil **Orozco**
+48 605 592 786
e.orozco@famed.pl

Anna **Maciąg**
+48 601 276 583
a.maciag@famed.pl

